


# MINI RITM TRIMLESS FOR SMART RINGS

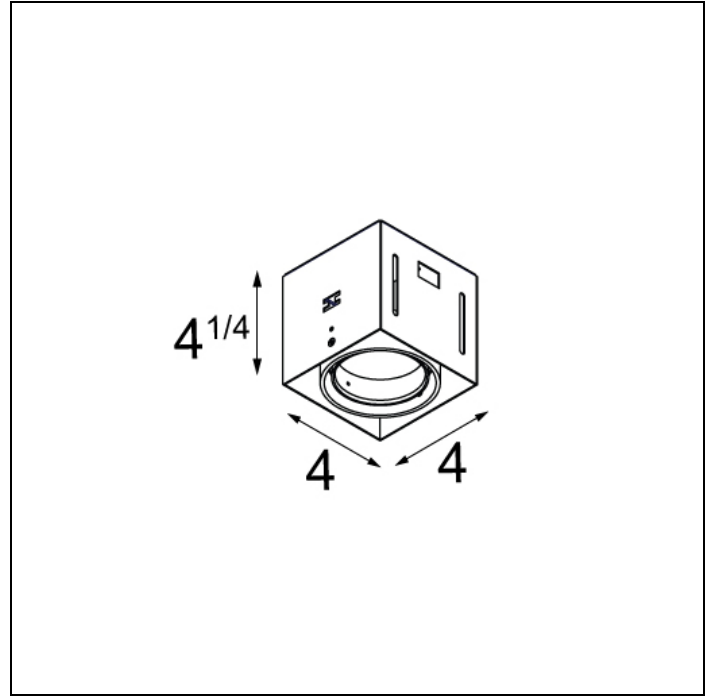

## MINI RITM TRIMLESS FOR SMART RINGS 1X LED DE

After twenty years still one of the architect's favorites. Mini ritm trimless, with its minimalistic features becomes part of the interior. Its dark or white casing vanishes when switching on the light. The versatile Mini ritm leaves nothing to the imagination with the technology on full display, allowing this luminaire to fit well into both a minimalist and an industrial-chic environment. The gimbale system allows you to direct the light source at any angle of your choice. Connect Mini ritm trimless with Smart by adding the Smart frontrings to your recessed spot.

Art. Nr. US\_12530302

### SPECIFICATIONS

Lamp	1x LED Array	
Driver	driver excluded - requires housing	
Cut-out size	1 4"11/64 w 4"11/64	
Weight	1.6kg	
Min. distance	4 in.	
Location rating	suitable for damp locations	
Glow wire test	960°	
webterm_lifetime	L80 B20 @ 50.000 hrs	
CRI	92	
Power supply	350mA 17.8Vf	<b>500mA</b> <b>18.4Vf</b>
webterm_connected_load	6.2W	<b>9.2W</b>
webterm_lumen	568lm	<b>763lm</b>
Efficacy	92lm/W	<b>83lm/W</b>
UGR	14	<b>15</b>
Adjustability	v -35°/+35°	
Remark	<p>! has to be combined with Smart frontrings</p> <p>! suitable for damp locations</p> <p>! has to be used with appropriate housing (LED gear incl.)</p> <p>! combine with drywall plaster flange for ceiling thickness &gt; 0 25/32" (20mm) and ≤ 1 31/32" (50mm)</p> <p>! CCEA Chicago Plenum rated &amp; Airtight per ASTM-E283-04 (when used with IC-UAT box)</p>	

	WARM WHITE 2700K / CRI 92+	WARM WHITE 3000K / CRI 92+	WARM WHITE 3500K / CRI 92+
black	US_12530002	US_12530202	<b>US_12530302</b>
white struc	US_12530009	US_12530209	US_12530309

